

## Specifications

Items	Number	Unit	MRB0855T	MRB0855N
<b>Binding</b>			<i>Twine</i>	<i>Net</i>
<b>Pick-up</b>				
Working width		cm	80	80
Number of tines		pcs	6 × 4	6×4
Both end of tine		cm	61.6	61.6
<b>Bale Chamber</b>				
Diameter		cm	50	50
Width		cm	70	70
The number of Steel rollers		pcs	10	10
<b>Required Tractor Power</b>				
Power		kW (PS)	13~22(18~30)	13~22(18~30)
Working speed		km/hr	3-5	3-5
PTO shaft speed		r.p.m.	540	540
<b>Overall Dimentions</b>				
Length		cm	115	115
Width		cm	130	130
Height		cm	130	130
Aprox.weight		kg	330	350
<b>Tire size</b>			16L-6.50-8-4PR	16L-6.50-8-4PR
<b>Connection/Others</b>				
P.T.O. Drive shaft			○	○
3P Category			Category I	Category I
Power package			○	○
Full automatic operation system			○	○
<b>Voltage(Control Box)</b>			12-13.8V	12-13.8V

○ = STANDARD

Remarks : Bale size and Bale weight varies depending on materials.

Figures, technical data, dimensions and weights are subject to changing without notice.


### Net · Twine

You can choose either double twine binding device or net binding device.

**Twine binding (Model: - T)** provides good efficiency with low binding material cost.

**Net binding (Model: - N)** provides excellent efficiency and minimum loss of crop.

Since both devices are located in front of the baler, binding process can be easily find from driver's seat.

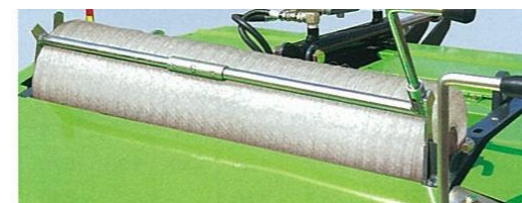

# MINI ROUND BALER

MODEL: MRB0855N/T



<http://www.ihico.jp/iat/en/>



**IHI Agri-Tech Corporation**

1061-2 Kamiosatsu, Chitose, Hokkaido, 066-8555, Japan

TEL : 81-123-26-2210

FAX : 81-123-26-2412

<http://www.ihico.jp/iat/en/>

# The high mobility and performance

Light and compact body enables you to work in small field




## Why choose Small Size

With compact design and 3point hitch direct attaching, it can easily turn in a small field in comparison with traction type hay baler. Light body enable works on wet fields as well.



## Easy handling bale

Bale size is 70cm width x 50cm diameter, and easy to handle, especially for women and elderly.

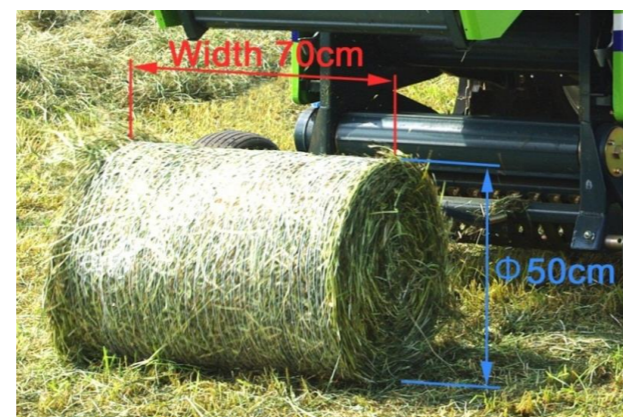


## Switch box

All the operation is done on your tractor seat by the switch box. The buzzer goes off and notifies you when bale density reaches a set value.



## Safety device

The gearbox output is protected by shear bolt. When overload occurs, the shear bolt will cut itself and protect the machine from damage.

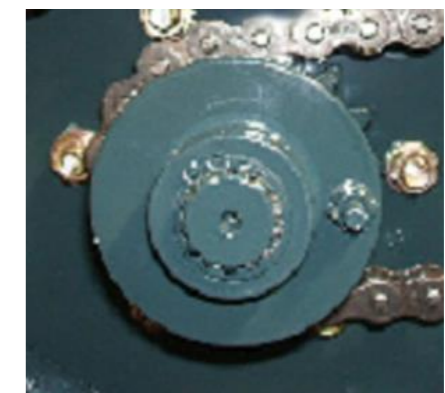

## Easy adjustment of bale density

The bale density can be easily set to 8 different levels with pin installation.



## Durable steel rollers

Highly durable steel rollers are adopted for the compression system. Power fluctuation is less than hay square baler, stable and noiseless operation can be expected.



## Power package

Power package unit is equipped as standard for tailgate opening. All the operation does not need any hydraulic output of tractor. It enables to work with wide range of tractor.



## Tire tread

The tire tread can be adjusted not to trace the tractor's wheel trace.

